


60x15W RGBW LED Wall washer light (IP65)



USER MANUAL

1、 Control menu

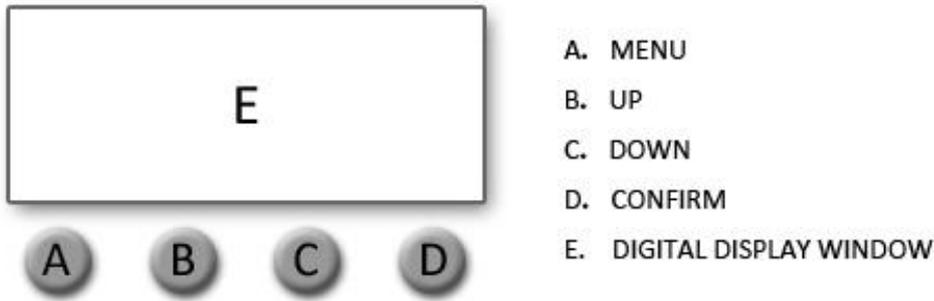

- A. MENU
- B. UP
- C. DOWN
- D. CONFIRM
- E. DIGITAL DISPLAY WINDOW

Display:

- MENU** To select the programming functions
- DOWN** To go backward in the selected functions
- UP** To go forward in the selected functions
- ENTER** To confirm the selected functions (**unlock screen**)

Set DMX Address:

1. Press "**ENTER**" to unlock screen, then press "**Menu**" to select "**Address**" and press "**ENTER**".
2. Showing "**DMX[001]**", Press the "**UP** or **DOWN**" keys to increase or decrease the DMX address value. Press "**ENTER**" to save and Exit, Press "**MENU**" does not save and Exit

2. LED display window function table (all functions are selected and then press D key to confirm)

No.	display	function
1	A001	4-channel address code, (001-512) B, C key plus or minus address code value
2	H001	8-channel address code, (001-512) B, C key plus or minus address code value
3	h001	12 channels, address code, (001-512) B, C key plus or minus address code value
4	CC50	Colorful jump, (00-99) B, C key to modify the jump speed
5	CP50	Colorful pulse change, gradient, (00-99) B, C key to modify the pulse change, gradient speed
6	DE50	Colorful running, (00-99) B, C key to modify the running speed
7	DEDE	Colorful voice control changes, (00-99) B, C key to modify the speed of voice control changes
8	R255	R color selection change, (000-255) B, C key to modify the speed of voice control changes
9	G255	G color selection change, (000-255) B, C key to modify the speed of voice control changes
10	B255	B color change, (000-255) B, C key to modify the speed of voice control changes
11	n255	Strobe, (000-255), RGB color selection is effective for strobe B, C key plus or minus strobe speed

3. DMX512 4ch description

No.	Function	Description
First channel	R dimming	R dimming, linear dimming, from dark to bright
Second channel	G dimming	G dimming, linear dimming, from dark to bright
Third channel	B dimming	B dimming, linear dimming, from dark to bright
Fourth channel	W dimming	W dimming, linear dimming, from dark to bright

4. DMX512 6ch description

number	function	description
First channel	Total dimming	R, G, B, total dimming, linear dimming, from dark to bright
Second channel	Total strobe	R, G, B, total strobe, slow to fast
Third channel	R dimming	R dimming, linear dimming, from dark to bright
fourth channel	G dimming	G dimming, linear dimming, from dark to bright
fifth channel	B dimming	B dimming, linear dimming, from dark to bright
6th ^h channel	W dimming	W dimming, linear dimming, from dark to bright

5. DMX512 9ch description

number	function	description
First channel	Total dimming	R, G, B,W total dimming, linear dimming, from dark to bright
Second channel	Total strobe	R, G, B,W total strobe, slow to fast
Third channel	R dimming	R dimming, linear dimming, from dark to bright
4th channel	G dimming	G dimming, linear dimming, from dark to bright
5 th channel	B dimming	B dimming, linear dimming, from dark to bright
6th channel	W dimming	W dimming, linear dimming, from dark to bright
7th channel	Color selection	R,G,B,G +color mixing
8th channel	Macro	Built-in function
9 th Channel	Speed	0-255 Speed for build-in function, from fast to slow

6. Features:

The operation is very simple, user-friendly design, dimming, no flicker, jitter phenomenon, etc. It can be adapted to photography, photography, TV stations and other occasions where lighting requirements are strict.