User manual of 200W Studio Light










Please read over this manual before operation the light

Menu:

1. The Introduction of LED display panel:

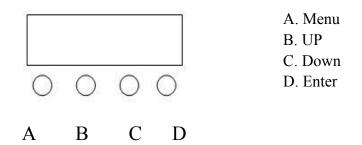

Press A button, there will be eight different effects.

The first two letters stands for functions (refer to Diagram II)

The last two letters stands for DMX address, or speed,.

You can modify it with **B** or **C** button. And press **D** button for confirmation.

2. Function of LED Display Window (press button D to confirm all the function)

Si

No.	Display	Function
1	D001	Address setting
2	BUTT	LED dimmer
3	ROLL	Potentiometer to adjust brightness
4	ТООО	Lamp bead working temperature

specification

Input voltage: AC90-260V/50/60Hz

Rated power: 200W

Light source: 900 pieces imported high-brightness LED

Light source life: 50000 hours

Color temperature: 3200K/5600K/2in1(3200K+5600K) optional

CRI: Ra≥90

Light adjustment: 0~100% linear electronic dimming (16-bit flicker free)

Control method: DMX512 console protocol, manual

Control mode: 1CH/2CH channel

Operation: The digital tube displays the control address code and dimming value

Pitch angle: 0~60°

Working temperature: -10°~40°

Cooling system: natural heat dissipation of high thermal conductivity pure aluminum

molding radiator

Lamp body size: 600×600×128mm

Packing size: 650×650×160mm (single carton)

Net weight: 7.8kg Gross weight: 9.8kg

DMX512 channel list (Single color)

СН	Function	Description
1	Dimmer	(0-255) LED linear dimmer, 0-100%

DMX512 channel list (2in1 color)

СН	Function	Description
1	White	(0-255) LED linear dimmer, 0-100%
2	Warm white	(0-255) LED linear dimmer, 0-100%

3.In the address code state, after multiple machines are connected, if the console is not connected, the master-slave online function can be realized, and one of the devices can be operated, and the other devices in the address d001 state will run the program synchronously with the host. After the console is turned on, if the console signal is received, the fourth decimal point of the address code will flash, and the device in the address state can be controlled by the console.

Easy to operate, humanization design, flicker free while dimmer; Stable quality. Applicable to photograph, camera, and TV station as well.