


200W LED fresnel spot light

The Introduction of LED display panel:

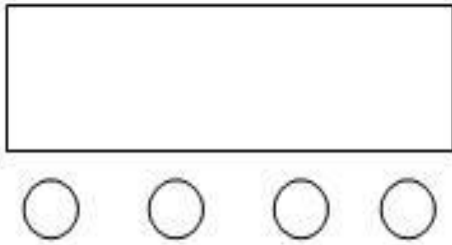

- A. Menu
- B. UP
- C. Down
- D. Enter
- E. LED Display Window

A B C D

Press **A** button, there will be eight different effects.
 The first two letters stands for functions (refer to Diagram II)
 The last two letters stands for DMX address, or speed,
 You can modify it with **B** or **C** button. And press **D** button for confirmation

1. Function of LED Display Window (press button D to confirm all the function)

| No | Display | Function |
|----|-------------------|--|
| 1 | DMX-4CH D: 001 | Add Code, with B. C button to change the code(001-512) |
| 2 | DMX-CH D: 4CH | DMX model select, (4CH/2CH/1CH) with B. C button to select |
| 3 | Gchange D: 099 | Gchange, (01—99) with B. C button to change (01-99) |
| 4 | Voice D: 000 | Sound control, (00—01) with B. C button to change the sound model(00-01) |
| 5 | Color W D: 255 | Color select, (000—255) with B. C button to select the color(001-255) |

2. Function of LED Display Window (press button D to confirm all the function)

| No | Display | Function |
|----|--------------------|---|
| 1 | current w: 235 | White current, (20—255) with B. C button to change the current |
| 2 | LEDspeed D: 150 | Dimmer speed, (000—255) with B. C button to change |
| 3 | oC D: 060 | Temperature set, (040—070) with B. C button to change |
| 4 | Model D: ***** | Program serial number |

4. DMX512 4CH

| channel | function | Description |
|---------|-----------------|--|
| Ch1 | dimmer | dimmer, from dark to bright |
| Ch2 | White | White dimmer, from dark to bright |
| Ch3 | strobe | White strobe,from dark to bright |
| Ch4 | Function select | 0—20: no function; 21—200: strobe and strobe speed; 201—255: sound |

5. DMX512 2CH

| channel | function | Description |
|---------|----------|-----------------------------------|
| Ch1 | dimmer | dimmer, from dark to bright |
| Ch2 | White | White dimmer, from dark to bright |

6. DMX512 1CH

| channel | function | Description |
|---------|--------------|-----------------------------------|
| Ch1 | White dimmer | White dimmer, from dark to bright |

7. Feature:

Easy to operate, humanization design, no flicker while dimmer; Stable quality.

Applicable to photograph, camera, and TV station as well