


# Strobe 1344 RGB IP65 USER MANUAL (24ZONE)



• **MENU**

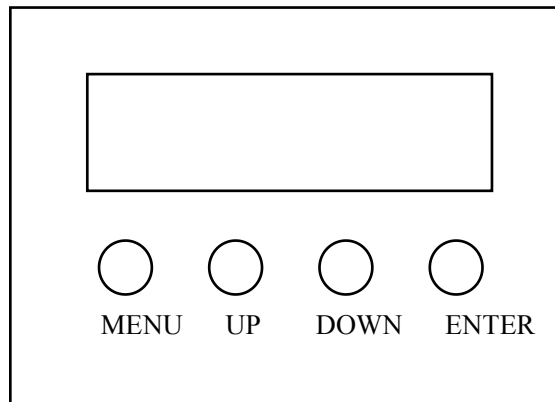

• **Specification:**

Power Supply: AC 90-260V, 50/60Hz

Power Consumption: 650W

LED: 1344PCS 5050SMD RGB LEDs

Strobe :0-20HZ

Control Mode: DMX512, RDM, master-slave, sound-activated or auto operation

DMX Channels:3CH/7CH/72CH

Dimmer: 0-100%

Dot matrix in 24 segments, with individual colors control

Protection rate: IP65

Power : PowerCon connection in & out

DMX : 3pin or 5pin in & out

Weight: 12 kg

Dimension: 650\*350\*140mm

• **DISPLAY FUNCTION:**

		Describe
1	A001-A512	DMX settingA001~A512
2	CH03-CH24	DMX mode:3CH、 7CH、 72CH
3	FF00-FF99	Color changing function 1, from slow to fast
4	EE00-EE99	Color changing function 2, from slow to fast
5	P000-P241	127auto effects
6	S000-S255	Auto effect speed: from slow to fast
7	Soud-Soud	Sound mose
8	R255-R000	Red
9	G255-G000	Green
10	B255-B000	Blue
11	T000	Working Temperature

• **DMX channel:**

CH	03CH	07CH	72CH
1CH	000-255 Red	000-255 Dimmer	000-255 Zone 1 red
2CH	000-255 Green	000-255 Red	000-255 Zone 1 green
3CH	000-255 Blue	000-255 Green	000-255 Zone 1 blue
4CH	///	000-255 Blue	000-255 Zone 2 red
5CH	///	000-255 Strobe speed	000-255 Zone 2green
6CH	///	000-255 Auto effect 1	000-255 Zone 2 blue
7CH	///	000-255Auto effect 2	000-255 Zone 3 red
8CH	///	000-255Auto effect 3	000-255 Zone 3 green
9H	///	000-255 Speed	000-255 Zone 3 blue
... ↓	... ↓	... ↓	..... ↓
70CH	///	///	000-255 Zone24 red
71CH	///	///	000-255 Zone24 green
72CH	///	///	000-255 Zone24 blue